

- GENERAL NOTES:**
- 1) ALL TREE PITS & PLANTING BEDS SHALL BE MULCHED WITH A MINIMUM OF 3" OF PINE BARK MULCH.
 - 2) THE PLANTING SOIL MIX FOR AZALEA & RHODODENDRON PLANTINGS SHALL CONSIST OF 2 PARTS LOAM-TOPSOIL & ONE PART PEAT MOSS. NO BONE MEAL OR OTHER CALCAREOUS SUBSTANCE SHALL BE APPLIED TO THESE PLANTS.
 - 3) PLANTING DETAILS ARE INCLUDED AS PART OF THE SPECIFICATIONS.
 - 4) ALL PLANTING BEDS, PLANTINGS & LOCATIONS OF PLANT MATERIAL SHALL BE STAKED OR OTHERWISE LOCATED BY THE CONTRACTOR FOR APPROVAL BY THE ENGINEER PRIOR TO INSTALLATION OF ANY OF THE SPECIFIED PLANT MATERIAL.
 - 5) LARGE STONES TO BE EMPLOYED IN THE PLANTING BED ON THE WESTERLY (FRONT) SIDE OF THE OPERATIONS BUILDING, SHALL BE WEATHERED DARK GRAY & NOT HEAVY UNWEATHERED. THEY SHALL BE FLUXED TO FORM A PART OF THE BORDER OF THE PLANTING BED WHERE THEY ABUT THE SOD PANEL & THEY SHALL BE FIRMLY PLACED.
 - 6) THE SCHEDULE OF PLANT MATERIAL IS INCLUDED AS PART OF THE SPECIFICATIONS.
 - 7) METAL EDGES SHALL BE INSTALLED AT ALL LOCATIONS WHERE BARK MULCH OR CRUSHED STONE ADJUT ROADWAY SURFACES CONSTRUCTED WITHOUT BERMS OR CURBS.


RECORD DRAWING

NUMBER	DATE	MADE BY	CHECKED BY	REVISIONS	DESCRIPTION

DRAWN BY
R.W. WATSON

DEPT. CHECK
R.W. WATSON

PROJ. CHECK
R.J. Marshall

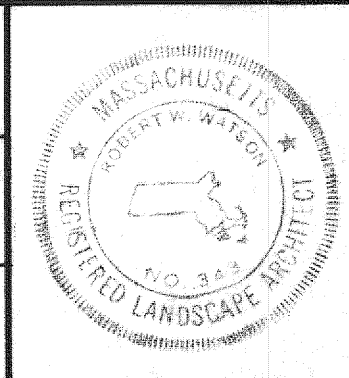

M&E
METCALF & EDDY, INC. / ENGINEERS
BOSTON / NEW YORK / PALO ALTO / CHICAGO

Robert Watson
LANDSCAPE ARCH. MASS. NO. 349
Michael E. Grilli
REG. PROF. ENGR. No. 3630

DATE
JUNE 1977
DATE
6-27-77

SCALE:

1" = 20'-0"

UNLESS OTHERWISE NOTED OR CHANGED BY REPRODUCTION

TOWN OF BURRILLVILLE, RHODE ISLAND
BOARD OF SEWER COMMISSIONERS

WASTEWATER TREATMENT FACILITIES

LANDSCAPING
ARCHITECTURAL

JOB **4868**

FILE NO. **H-68988-1**

SHEET **A-20**